



F3 CL 080

CANTILEVER TAIL-LIFTS

LOAD CAPACITY: 800 KG



DESCRIPTION

The 4 cylinders F3 CL 080 is a very light strong and compact lift, with very high performances. Smooth hydraulic automatic tilt. High stiffness ideal to equip vehicles for customers that like high performances. The F3 CL 080 is available with a wide variety of quick-fit mounting plates, to suit most commercial vehicles and light trucks (up to 7.5T GVW) such as:

- Fiat DUCATO - Citroen JUMPER - Peugeot BOXER
- Ford TRANSIT
- Iveco DAILY
- Mercedes Benz SPRINTER
- Renault MASTER - Opel MOVANO
- Volkswagen CRAFTER - Man TGE

Towing hook preparation available on demand.

SPECIFICATIONS

Platform:	Aluminium
Platform depth:	from 1600 to 2000 mm rear bumper EEC type approved
Lift cylinders:	2
Tilt cylinders:	2
Autotilt at ground:	hydraulic (with memory feature)
Platform opening:	Gravity opening as standard
Power supply:	12 or 24 V
Low maint. bushes:	greasable
Frame color:	Black KTL plus and powder paint
Weight:	from 205 Kg

SUGGESTED OPTIONS

- Inside body remote control;
- Radio remote control;
- Foot operated controls on platform;
- Blinking lights on platform;
- Roll stop;
- Platform lock handle;
- Body seal kit





F3 CL 080

CANTILEVER TAIL-LIFTS

LOAD CAPACITY: 800 KG

TECHNICAL DATA


Mod.	Arm Width	Load Capacity (600 mm load centre)	Standard platform dimension		Platform opening	Weight* (Kg)	Floor to ground (max)	Floor to bottom of chassis		Mounting space
			Depth	Width				min	max	
F3 CL 080 C	W44 (440 mm) or W123 (1230 mm)	800 Kg	1200	on demand	Gravity Open or Power Open	205 225 245 285	980	240	420	441
F3 CL 080 C-1			1400					280	480	485
F3 CL 080 H			1600					300	530	550
			1800							

*Approximate weight for tail-lift equipped with aluminium platform dimensions 1400 x 2200 mm.


The above mentioned weights are approximate and may vary according to production. Anteo reserves the right to change weights and technical specifications without prior notice. No indemnity for damages can be claimed from Anteo for changes in technical specifications and/or in weight.

PLATFORM OPENING STANDARDS

- **Gravity Open:** for W44 or W123 when equipped with Whole Platform (**Power Open on demand - option**)
- **Power Open:** for W44 or W123 when equipped with Folded Platform

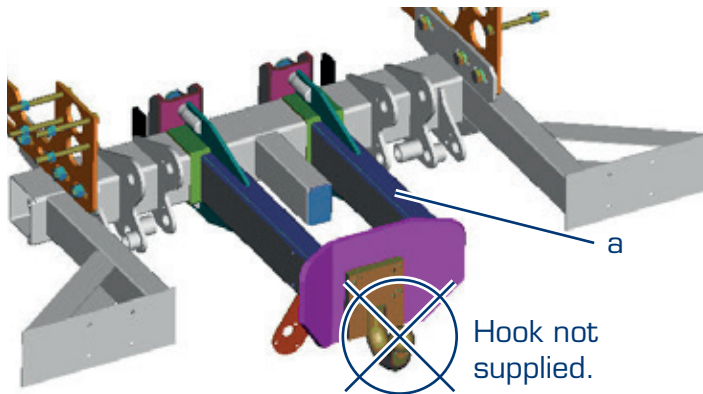


R55 type approved Towing Hook preparation (a) **on demand.**



LOW MAINTENANCE BUSHES AND CHROMIUM PLATED PINS.



POWDER COATING PAINT (2) ADDED TO KTL PLUS (1). NO RUST AND NO SALT STAINS.



HI-TENSILE ALUMINUM SPECIALISTS SINCE 1992.



LOW NOISE POWER UNIT & NO ELECTRONICS = EASY MAINTENANCE