



F3 RE-CL 22 CC

DUAL PURPOSE RETRACTABLE TAIL-LIFTS WITH CHROMIUM PLATED STEEL GUIDES

LOAD CAPACITY: 2200 KG



DESCRIPTION

Anteo has manufactured a tail-lift which can be used both as a retractable tail-lift, remaining housed under the body when not required, and as a cantilever tail-lift allowing unloading to be quicker and easier than using standard retractable tail-lifts. This model of Anteo tail-lift has been developed with transport operators in mind, particularly those on multi-drop work.

The F3 RE-CL 22 CC can remain stowed under the lorry when the vehicle loads on docks or in warehouses equipped with loading ramps and can be used as a cantilever tail-lift when it is used to unload the goods. The driver opens the retractable tail lift as normal at his first delivery, then uses the lift as a cantilever for the rest of his deliveries, and stows it away as a retractable after his final delivery or on returning to his depot.

SPECIFICATIONS

Platform:	Aluminium
Platform depth:	from 1683 to 2033 mm rear bumper EEC type approved
Lift cylinders:	2
Tilt cylinders:	2
Autotilt at ground:	hydraulic (with memory feature)
Sliding system:	Chromed steel guides with push-pull cylinder
Power supply:	12 or 24 V
Low maint. bushes:	greasable
Frame color:	Black KTL plus and powder paint
Weight:	from 625 Kg

SUGGESTED OPTIONS

- Inside body remote control;
- Radio remote control;
- Foot operated controls on platform;
- Blinking lights on platform;
- Roll stop;





F3 RE-CL 22 CC

DUAL PURPOSE RETRACTABLE TAIL-LIFTS WITH CHROMIUM PLATED STEEL GUIDES

LOAD CAPACITY: 2200 KG



TECHNICAL DATA

Mod.	Load capacity (centre of gravity at 600 mm)	Floor to ground (max)	Platform Depth* (example)	Mounting space (min)	Weight* Kg
F3 RE-CL 22 H CC	2200 Kg	1290	1683 (600+1083)	1690	605
			1783 (750+1033)	1840	635
F3 RE-CL 22 HS CC		1465	1783 (600+1183)	1840	665
			1783 (750+1033)	1990	665
	2033 (1000+1033)		2240	695	

*Approximate weight for tail-lift equipped with aluminium platform 2450 mm wide.

The above mentioned weights are approximate and may vary according to production. Anteo reserves the right to change weights and technical specifications without prior notice. No indemnity for damages can be claimed from Anteo for changes in technical specifications and/or in weight.


01/2021

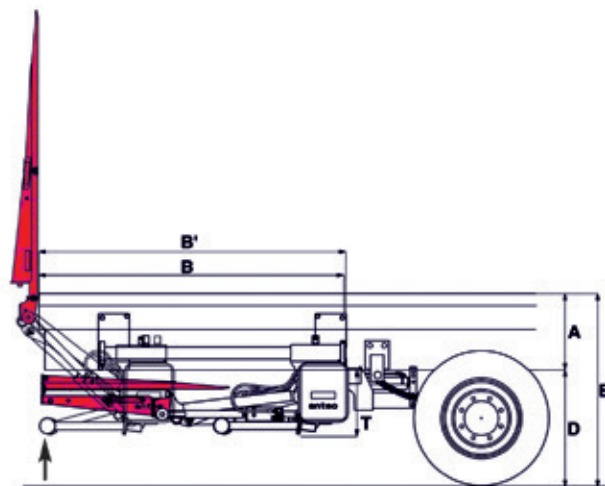

LOW MAINTENANCE BUSHES AND CHROMIUM PLATED PINS.



POWDER COATING PAINT (2) ADDED TO KTL PLUS (1). NO RUST AND NO SALT STAINS.



HI-TENSILE ALUMINUM SPECIALISTS SINCE 1992.



LOW NOISE POWER UNIT & NO ELECTRONICS = EASY MAINTENANCE