



F3 V 080

TAIL-LIFT FOR PANEL VANS

LOAD CAPACITY: 800 KG



DESCRIPTION

The 4 cylinders F3 V 080 tailor made for panel vans is a very light strong and compact lift, with very high performances.

Platform Powered opening that gives high speed of platform opening even with very low temperatures, smooth hydraulic automatic tilt, high stiffness ideal to equip vehicles for customers that like high performances.

The F3V080 is available with quick-fit mounting plates, to suit:

- Iveco Daily 35C / 50C

SPECIFICATIONS

Platform width:	1530 mm
Platform depth:	from 1400 to 1800 mm
Lift cylinders:	2
Tilt cylinders:	2
Autotilt at ground:	Hydraulic (with memory feature)
Platform opening:	Hydraulic opening
Power supply:	12 or 24 V
Frame color:	Black KTL plus and powder paint
Weight:	from 180 Kg

SUGGESTED OPTIONS

- Inside body remote control;
- Radio remote control;
- Foot operated controls on platform;
- Blinking lights on platform;
- Roll stop;
- Bridge plate to van floor;





F3 V 080

TAIL-LIFT FOR PANEL VANS




LOAD CAPACITY: 800 KG

TECHNICAL DATA

Mod.	Load Capacity (600 mm load centre)	Standard platform dimension		Weight* (Kg)	Floor to ground (max)	Floor to bottom of chassis		Mounting space	
		Depth	Width			min	max	min	max
F3 V 080	800 Kg	1400	1530	180	980	205	400	545	700
		1600		190					
		1800		200					

*Approximate weight for tail-lift equipped with aluminium platform dimensions 1400 x 2200 mm.
The above mentioned weights are approximate and may vary according to production. Anteo reserves the right to change weights and technical specifications without prior notice. No indemnity for damages can be claimed from Anteo for changes in technical specifications and/or in weight.


01/2021

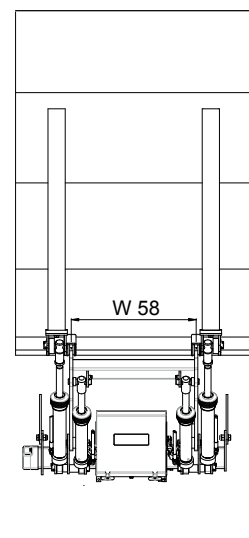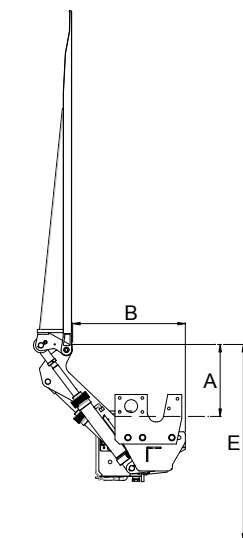

LOW MAINTENANCE BUSHES AND CHROMIUM PLATED PINS.



POWDER COATING PAINT (2) ADDED TO KTL PLUS (1). NO RUST AND NO SALT STAINS.



HI-TENSILE ALUMINUM SPECIALISTS SINCE 1992.



LOW NOISE POWER UNIT & NO ELECTRONICS = EASY MAINTENANCE