



**REP 12/1**  
**REP 15/1**

**TUCKAWAY TAIL-LIFTS**

LOAD CAPACITY: 1150, 1500 KG  
2500, 3300 LB



**DESCRIPTION**

The REP folding tail-lifts are the ideal tail-lifts for distribution, vehicle rental companies, for vehicles where the maximum variable use is needed and/or vehicles for docking work.

REP 12/1 is very light and compact. Therefore, it is suitable for small vehicles from 3.5 to 7 tons.

REP 15/1 for vehicles weighing 7 tons or more.

**SPECIFICATIONS**

|                     |                                 |
|---------------------|---------------------------------|
| Platform depth:     | from 1133 to 1500 mm            |
| Platform width:     | 2000 mm (2500 max)              |
| Lift cylinders:     | 1                               |
| Tilt cylinders:     | none                            |
| Autotilt at ground: | Mechanical                      |
| Platform opening:   | Manual opening                  |
| Power supply:       | 12 or 24 V                      |
| Frame color:        | Black KTL plus and powder paint |
| Weight:             | from 310 Kg                     |

**SUGGESTED OPTIONS**

- Inside body remote control;
- Radio remote control;
- Foot operated controls on platform;
- Blinking lights on platform;
- Roll stop;
- Light brackets





**REP 12/1**  
**REP 15/1**

**TUCKAWAY TAIL-LIFTS**


LOAD CAPACITY: 1150, 1500 KG  
2500, 3300 LB

**TECHNICAL DATA**

| Mod.     | Load capacity<br>(centre to centre at<br>600 mm - 23 in) | Standard platform dimensions<br>Depth x Width | Weight *        | Floor to ground<br>(max) | Mounting space<br>(min) |
|----------|--|---|-----------------|--------------------------|-------------------------|
| REP 12/1 | 1150 Kg<br>2500 lb                                       | 1150 x 2000 mm / 45 x 78 in                   | 310 Kg / 683 lb | 1450 mm<br>57 in         | 1185 mm<br>46,7 in      |
|          |  | 1250 x 2000 mm / 49 x 78 in                   | 318 Kg / 701 lb |                          |                         |
|          |  | 1450 x 2000 mm / 57 x 78 in                   | 328 Kg / 723 lb |                          |                         |
|          |  | 1500 x 2000 mm / 59 x 78 in                   | 331 Kg / 729 lb |                          |                         |
| REP 15/1 | 1500 Kg<br>3300 lb                                       | 1133 x 2000 mm / 44 x 78 in (**)              | 318 Kg / 701 lb | 1450 mm<br>57 in         | 1185 mm<br>46,7 in      |
|          |  | 1233 x 2000 mm / 48 x 78 in (**)              | 328 Kg / 723 lb |                          |                         |
|          |  | 1433 x 2000 mm / 56 x 78 in (**)              | 331 Kg / 729 lb |                          |                         |

\*Weight does not include rear cross member (50 Kg - 110 lbs). \*\* width up to 2500 mm available on demand. The above mentioned weights are approximate and may vary according to production. Anteo reserves the right to change weights and technical specifications without prior notice. No indemnity for damages can be claimed from Anteo for changes in technical specifications and/or in weight.


01/2021



**LOW MAINTENANCE BUSHES AND CHROMIUM PLATED PINS.**



**POWDER COATING PAINT (2) ADDED TO KTL PLUS (1). NO RUST AND NO SALT STAINS.**

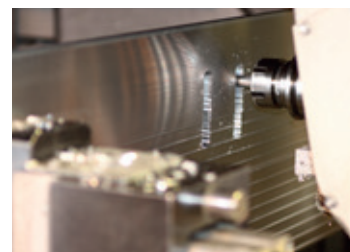

**HI-TENSILE ALUMINUM SPECIALISTS SINCE 1992.**



**LOW NOISE POWER UNIT & NO ELECTRONICS = EASY MAINTENANCE**



www.anteo.com - anteo@anteo.com  
ANTEO S.p.A. - Via Nobili 68-70, 40062 Molinella (Bo) - ITALY - +39 051 6906611

