# REP-CL 06 LR

#### CANTILEVER TAIL-LIFTS WITH MANUAL OPENING

LOAD CAPACITY: 600 KG



## SPECIFICATIONS

Platform:	Aluminium				
Platform depth:	from 1100 to 1500 mm rear bumper EEC type approved				
Lift cyliders:	1				
Tilt cylinders:	none				
Autotilt at ground:	none - level-ride				
Platform opening:	Manual opening				
Power supply:	12 or 24 V				
Low maint. bushes:	greasable				
Frame color:	Black KTL plus and powder paint				
Weight:	from 225 Kg				

### DESCRIPTION

The REP CL O6 LR cantilever tail-lifts with manual opening are the ideal tail-lifts for logistic companies, vehicle rental companies and tool hire companies.

REP CL 06 LR is very light and compact. Therefore, it is suitable for smaller vehicles from 3.5 to 7 tons and pick-up.

MESH ALUMINIUM PLATFORM (on demand):

- very strong alloy;
- less weight, more payload;
- less wind drag, lower fuel consumption;
- no paint and no rust;
- brilliant for the life.

### SUGGESTED OPTIONS

- Inside body remote control;
- Radio remote control;
- Foot operated controls on platform;
- Blinking lights on platform;





www.anteo.com - anteo@anteo.com ANTEO S.p.A. - Via Nobili 68-70, 40062 Molinella (Bo) - ITALY - +39 051 6906611



# **REP-CL 06 LR**

CANTILEVER TAIL-LIFTS WITH MANUAL OPENING

LOAD CAPACITY: 600 KG


#### **TECHNICAL DATA**

Mod.	Load Capacity (600 mm load centre)	Standard platform dimension		Weight*	Floor to ground	Floor to bottom of chassis		Mounting space	
		Depth	Width	(Kg)	(max)	min	max	min	max
REP-CL O6 LR C	600 Kg	1100 1300 1500	2000	240	980	300	430	848	942
REP-CL O6 LR H				255	1100	430	500	985	1050

\*Approximate weight for tail-lift equipped with aluminium platform dimensions 1300 x 2000 mm.

The above mentioned weights are approximate and may vary according to production. Anteo reserves the right to change weights and technical specifications without prior notice. No indemnity for damages can be claimed from Anteo for changes in technical specifications and/or in weight.



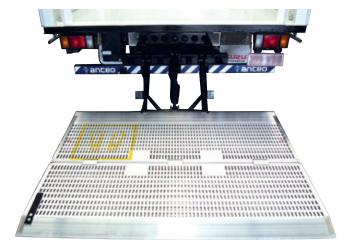



LOW MAINTENANCE BUSHES AND CHROMIUM PLATED PINS.



POWDER COATING PAINT (2) ADDED TO KTL PLUS (1). NO RUST AND NO SALT STAINS.



HI-TENSILE ALUMINUM SPECIALISTS SINCE 1992.



LOW NOISE POWER UNIT & NO ELECTRONICS = EASY MAINENANCE



www.anteo.com - anteo@anteo.com ANTEO S.p.A. - Via Nobili 68-70, 40062 Molinella (Bo) - ITALY - +39 051 6906611



in 👛 f