





Mechanical stop on platform - Full width rubber profile suitable for light aluminum or plywood bodies.




Mechanical stop on platform - Full width rubber profile suitable for light aluminum or plywood bodies.

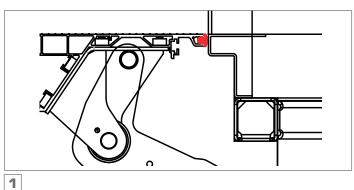


Mechanical stop on platform - Adjustable plastic pads (two) suitable for robust and insulated bodies.

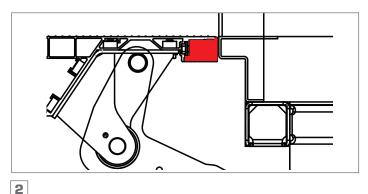

Mechanical stop on platform - Adjustable plastic pads (two) suitable for robust and insulated bodies.

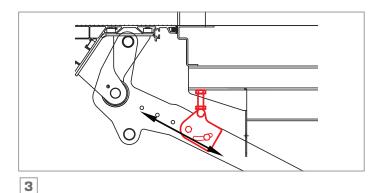

Mechanical stop on arms - Adjustable by means of a contrast screw.

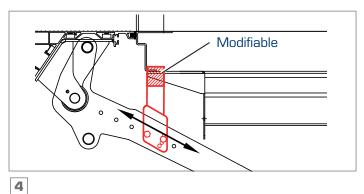

Mechanical stop on arms - Modifiable to be cut or shaped according to the possibilities or needs of application. (by the bodybuilder)









HYDRAULIC GEAR



5Extra-thin control with in-cab switch (main control for origi-

nal vans).



Support for the quick assembly of the control box.



Inside body remote control (spiral cable).




2 and 4 functions radio control with case.



Vehicle battery charger for the radio control, with rechargeable battery.



Control box when options 40 or options 41 is supplied.



Anteo light on cabine showing platform position and on/off switch for vehicles not prepared with **VEHH** wiring.




Plug for light on cabine showing platform position and on/off switch for vehicles factory prepared with **VEHH** wiring.



Plugs for vehicles factory prepared with **VEHH** battery cables wiring.



Tractor/trailer electrical coupling.



Hydraulic stabilizers (already fitted).



Acoustic and illuminated alarm system for hydraulic outriggers.












HYDRAULIC GEAR



17 Mechanical stabilizers.


18

Battery protector.



19

F3CL080 - Power pack inside rear bumper for narrow bod-




20

F3CL10 - Power pack inside rear bumper for narrow bod-



Removable hydraulic power pack notintegrate with the lift.



Towing hook support kit for F3CL 080 W58 and F3CL 080 W 123.



2 Brackets for truck rear lights (quick fitting).



Fully assembled retractable lift at factory.



25

All steel components hot-dip galvanised (on demand).



25

All steel components hot-dip galvanised (on demand).



Colour at customer specs. upon RAL table (no charge for minimum 10 unit plus).



27

Special cantilevers 1000 to 3000 kgs capacity for quiet deliveries and night time operations. It includes a silent power pack, sound-deadening platform coating and automated trolley stops.











PLATFORM




Automatic trolley stop **45°** (2 stops).




Automatic trolley stop **45°** (2 stops).



Automatic trolley stop **90°** (2 stops).



Automatic trolley stop **90°** (2 stops).



Automatic trolley stop (6 stops).



Foot control.



Lock-handle kit for locking the platform in the rest position.




Folding cantilever platform for drop side body.




Aluminium platform extension (for each 200 mm).



Assisted platform opening.



Platform extension for fridge bodies.



Flashing lights on platform.











PLATFORM




38

Perforated premium aluminium platform.




38

Perforated premium aluminium platform.



39

Platform milling for side grip.



40

Seals kit for closing platform to body.



41

F3CL 10-17-22-30 Conical platform on demand.



41

F3CL 10-17-22-30 Conical platform on demand.



42

Aluminium platform with anodizing treatment



43

Special cantilevers 1000 to 3000 kgs capacity for quiet deliveries and night time operations. It includes a silent power pack, sound-deadening platform coating and automated trolley stops.



43

Special cantilevers 1000 to 3000 kgs capacity for quiet deliveries and night time operations. It includes a silent power pack, sound-deadening platform coating and automated trolley stops.



43

Special cantilevers 1000 to 3000 kgs capacity for quiet deliveries and night time operations. It includes a silent power pack, sound-deadening platform coating and automated trolley stops.














SAFETY GATES




44

Drop-in Mushroom type safety gate




Drop-in Mushroom type safety gate



45

Structure to be fixed under the semi-trailer body to house 2 guards and the side ramp




45

Structure to be fixed under the semi-trailer body to house 2 guards and the side ramp



Guard **hinged** and folding on platform.




Guard **hinged** and folding on platform.



47

Drop-in safety gate.



Drop-in safety gate.



Pantograph safety gate




48

Pantograph safety gate



Pantograph safety gate



48

Pantograph safety gate












SAFETY GATES




49

360 deg. pivoting "P" type hinged & foldable safety gate.




49

360 deg. pivoting "P" type hinged & foldable safety gate.



50

"P" type hinged & foldable safety gate (not pivoting).



50

"P" type hinged & foldable safety gate **(not pivoting).**



51

Safety gate for column lift.



51

Safety gate for column lift.



51

Safety gate for column lift.



52

Auto-erect safety gate for column lift.



52

Auto-erect Safety gate for column lift.












SIDE RAMPS

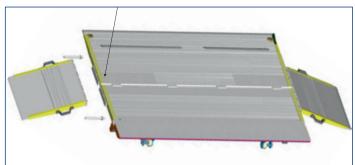

53

Removable side ramps for retractable tail-lifts (Ramps produced with strong & high tensile aluminium)



54 WG-SC SIDE RAMPS

Removable model for fixing to an aluminium rail integrated within the tail-lift's platform. Includes wheel guides, and safety curbs both sides.




55 SC SIDE RAMPS

A removable model for fixing to an aluminium rail integrated within the tail-lift's platform. No wheel guides. Safety curbs on both sides.



54 WG-SC SIDE RAMPS

Removable model for fixing to an aluminium rail integrated within the tail-lift's platform. Includes wheel guides, and safety curbs both sides.




55 SC SIDE RAMPS

A removable model for fixing to an aluminium rail integrated within the tail-lift's platform. No wheel guides. Safety curbs on both sides.



53

Removable side ramps for retractable tail-lifts (Ramps produced with strong & high tensile aluminium)



54 WG-SC SIDE RAMPS

Removable model for fixing to an aluminium rail integrated within the tail-lift's platform. Includes wheel guides, and safety curbs both sides.

Model	Length (L) mm	Capacity kgs	Weight kgs
SC 1	1.000	600	15
SC 2	1.200	600	18
SC 3	2.000	600	30

55 SC SIDE RAMPS

A removable model for fixing to an aluminium rail integrated within the tail-lift's platform. No wheel guides. Safety curbs on both sides.



53

Removable side ramps for retractable tail-lifts (Ramps produced with strong & high tensile aluminium)

Model	Length (L) mm	Capacity kgs	Weight kgs
WG-SC 1	980	600	13
WG-SC 2	1.180	600	15
WG-SC 4	1.480	600	18
WG-SC 3	1.980	600	24

54 WG-SC SIDE RAMPS

Removable model for fixing to an aluminium rail integrated within the tail-lift's platform. Includes wheel guides, and safety curbs both sides.







